




Standards:

- BS 5266 Part 1:2005,
- BS EN 60598-2-22:2002,
- BS5499-3:2002,
- FSD PPA 104(A) 4th Revision,
- FSD COP Clause 5.10 EXIT Sign.

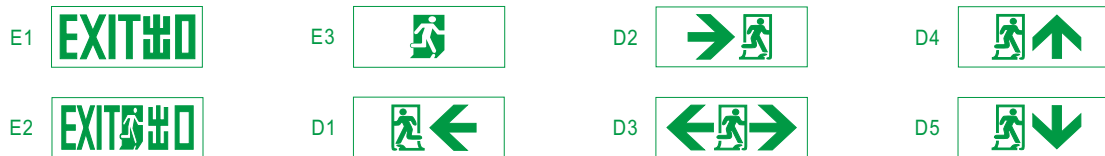

Features:

- Ceiling / Wall-mount.
- More reliable for using Ni-Cad / Ni-Mh battery.
- AC and DC mode are in same lumen output.
- High efficiency super flux LED lamps with high performance.

Specification:

- Self-contained, maintained type, automatic changeover device for minimum 2 or 3 hours battery back up.

Model	ALS-2C-L365	ALS-2C-L450	ALS-2C-L615
Battery Type	Sealed Ni-Cad <small>***Sealed Ni-Mh are available</small>		
Mode of Operation	Maintained Type <small>***Flash upon fire singal are available</small>		
Power Consumption	~3 W <small>***Adjustable</small>		
Emergency Duration	2 Hours <small>***3 Hours are available</small>		
Emergency Luminance	Average 100cd/m ² <small>***Adjustable</small>		
Battery	4.8V 800 mAh		
Line Voltage	A/C 220V 50Hz +/-10%		
Recharge Period	12 Hours for 2 Hours Discharge		
Metal Box Size	365L x 110H x 50D	450L x 110H x 50D	615L x 110H x 50D
Plate Size	320L x 160H x 8D	405L x 160H x 8D	570L x 160H x 8D

***Options will be available upon request