


Standards:

- BS 5266 Part 1:2005,
- BS EN 60598-2-22:2002,
- FSD PPA 104(A) 4th Revision.

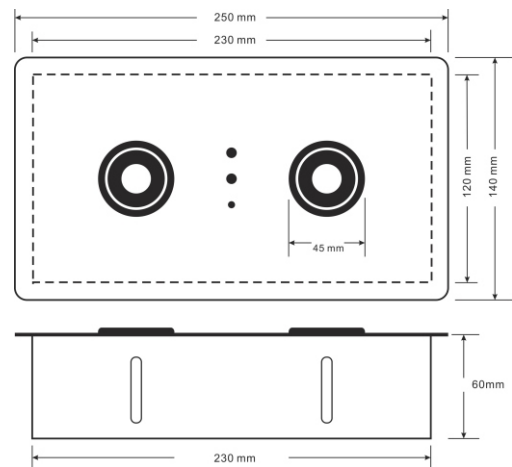

Features:

- More reliable for using Ni-Cad / Ni-Mh battery.
- Adjustable lamp head for wide illumination.
- High efficiency super flux LED lamps with high performance.
- Test Button to allow easy checking of luminaries operation
- Red and Green LED to indicate mains supply and charge are functioning.

Specification:

- Ceiling / Recess mounted, self-contained, non-maintained type, emergency LED twins spot light with automatic changeover device for minimum 2 or 3 hours battery back up.

Model	AC-S23
Battery Type	Sealed Ni-Mh <small>***Sealed Ni-Cad are available</small>
Mode of Operation	Non-maintained Type
Emergency Output	2 x 3W <small>***2 x 1W are available</small>
Emergency Duration	2 Hours <small>***3 Hours are available</small>
Battery	9.6V 1.25Ah
Line Voltage	A/C 220V 50Hz +/-10%
Recharge Period	12 Hours for 2 Hours Discharge <small>***Option will be available upon request</small>