




Standards:

- BS 5266 Part 1:2005,
- BS EN 60598-2-22:2002,
- FSD PPA 104(A) 4th Revision.

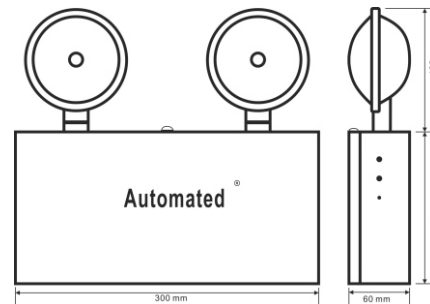

Specification:

- Surface mounted, self-contained, non-maintained type, emergency LED twins spot light with automatic changeover device for minimum 2 or 3 hours battery back up.

Features:

- Wall-mount.
- More reliable for using Ni-Cad / Ni-Mh battery.
- Adjustable lamp head for wide illumination with clear glass lens diffuser.
- High efficiency super flux LED lamps with high performance.
- Red and Green LED to indicate mains supply and charge are functioning.
- Test Button to allow easy checking of luminaries operation.

Model	AP-212
Battery Type	Sealed Ni-Cad <small>***Sealed Ni-Mh are available</small>
Mode of Operation	Non-maintained Type
Emergency Output	2 x 1W <small>***2 x 3W are available</small>
Emergency Duration	2 Hours <small>***3 Hours are available</small>
Battery	4.8V 800 mAh
Line Voltage	A/C 220V 50Hz +/-10%
Recharge Period	12 Hours for 2 Hours Discharge <small>***Option will be available upon request</small>