




Standards:

- BS 5266 Part 1:2005,
- BS EN 60598-2-22:2002,
- BS5499-3:2002,
- FSD PPA 104(A) 4th Revision,
- FSD COP Clause 5.10 EXIT Sign.

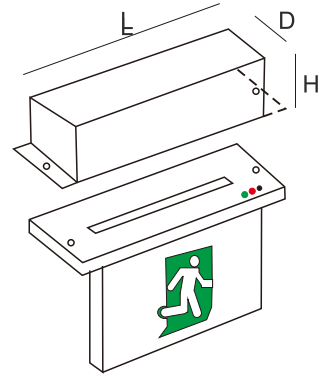

Features:

- Ceiling / Recess-mount.
- More reliable for using Ni-Cad / Ni-Mh battery.
- AC and DC mode are in same lumen output.
- High efficiency super flux LED lamps with high performance.

Specification:

- Self-contained, maintained type, automatic changeover device for minimum 2 or 3 hours battery back up.

Model	ALS-2C-LR370	ALS-2C-LR455	ALS-2C-LR620
Battery Type	Sealed Ni-Cad <small>***Sealed Ni-Mh are available</small>		
Mode of Operation	Maintained Type <small>***Flash upon fire signal are available</small>		
Power Consumption	~3 W <small>***Adjustable</small>		
Emergency Duration	2 Hours <small>***3 Hours are available</small>		
Emergency Luminance	Average 100cd/m ² <small>***Adjustable</small>		
Battery	4.8V 800 mAh		
Line Voltage	A/C 220V 50Hz +/-10%		
Recharge Period	12 Hours for 2 Hours Discharge		
Metal Box Size	370L x 50H x 100D	455L x 50H x 100D	620L x 50H x 100D
Plate Size	320L x 160H x 8D	405L x 160H x 8D	570L x 160H x 8D

*****Options will be available upon request**